

Low Pulsation Realized Without Damper
Contributes to Total Cost Reduction





FLP-75W
EFG-32M



FLP-60W
EFG-20M

Low Pulsation Realized Without Damper Contributes to Total Cost Reduction

The unique design of the FLP bellows pump achieves low pulsation and high pressure sustaining capability. This produces a stable discharge capacity and pressure without the use of a dampener. Reduced air consumption up to 30% compared to our previous models is also achieved.



Low Pulsation

The unique drive mechanism of the system determines and maintains optimum movement of the bellows and supply-air switching to give minimum discharge pulsation.



Reduction of Air Consumption

Reduced air consumption up to 30% compared to our previous models is achieved with no reduction of pump performance.



High Sustained Pressure Capability


The optimum bellows movement improves pressure sustaining capability to maintain stable discharge capacity and pressure under frequent load change, especially in single wafer processing.




Elimination of a Damper

The pump works without the use of a dampener, saving space inside equipment & installation costs such as fluoroplastic joints. The total weight/size of the equipment is also minimized.


FLP-60W

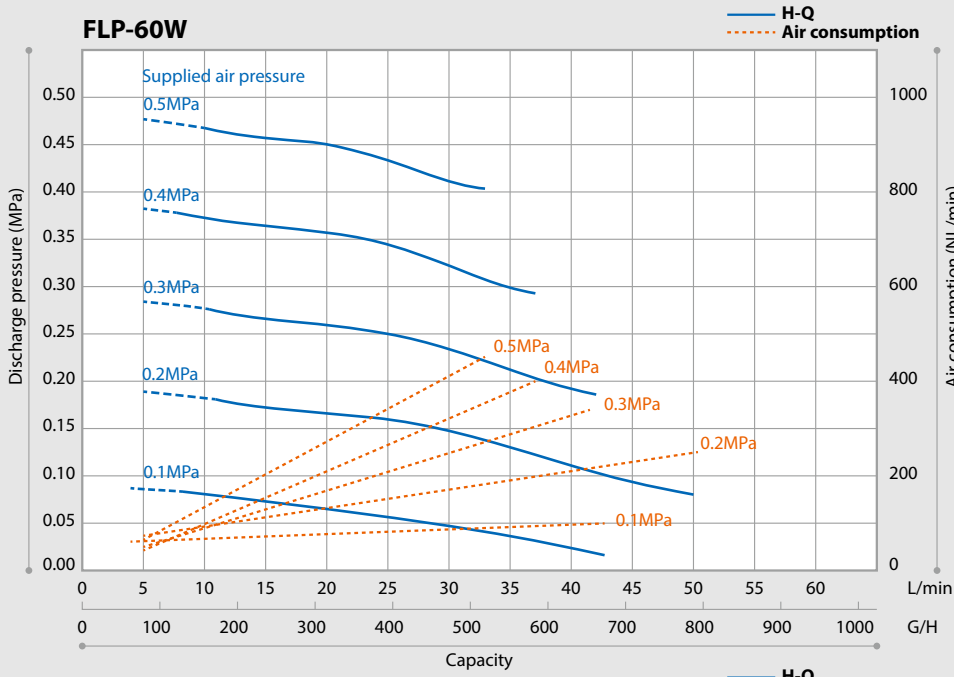

FLP-75W

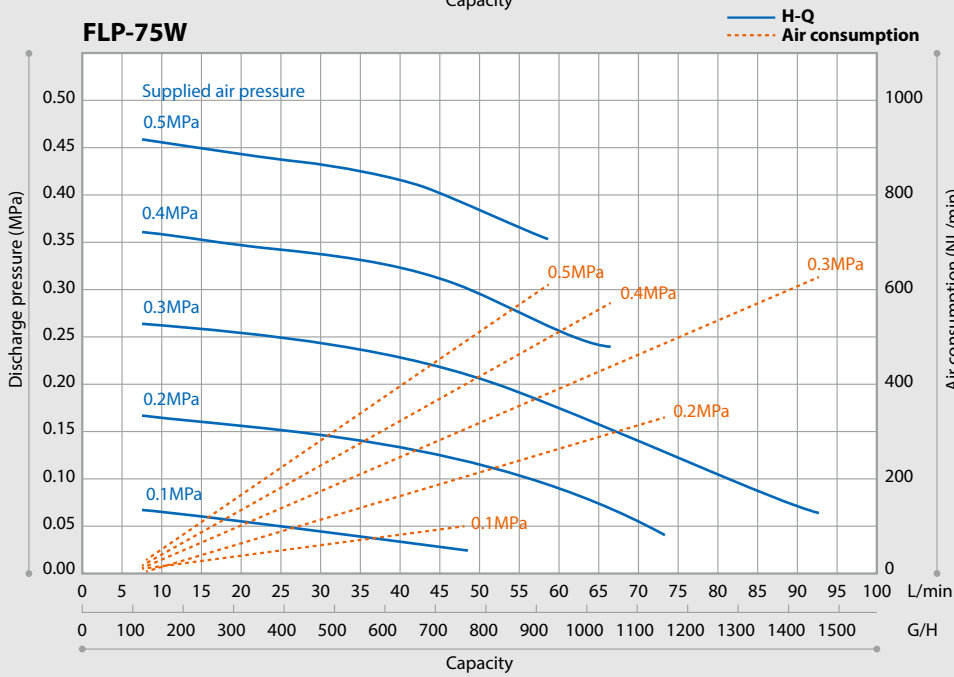

Compared to Existing Pumps

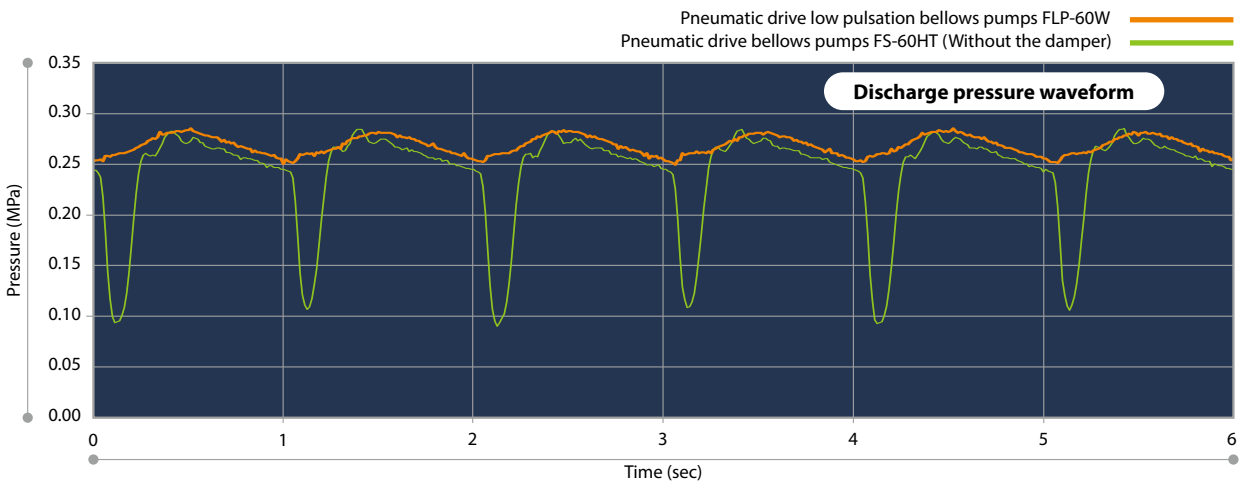

Sharp drops of discharge pressure are minimized, reducing the pulsation compared to existing pumps, Suction pressure drops are at the same level as existing pumps, but the pulsation width has been reduced.





Specification of Pumps

Model	FLP-60W					FLP-75W				
Max. discharge capacity ^{Note1}	L/min					92				
Max. pulsation width	MPa					0.06				
Liquid temperature range (Max. supply air pressure)	°C (MPa)					5 - 100 (0.5), 101 - 150 (0.4), 151 - 180 (0.3)				
Supply air pressure range	0.41 - 0.5	0.31 - 0.4	0.21 - 0.3	0.11 - 0.2	0.1	0.41 - 0.5	0.31 - 0.4	0.21 - 0.3	0.11 - 0.2	0.1
Max. stroke rate	spm					160				
Max. air consumption	464	419	338	252	116	647	608	615	355	99
Max. viscosity	mPa·s					50				
Suction lift ^{Note2}	m					1				
Main materials	PTFE, PFA									
Ambient temperature/humidity	°C /%RH					0 - 40 (non-condensing) / 30 - 60 (non-condensing)				
Storage temperature/humidity	°C /%RH					-10 - 60 (non-condensing) / 20 - 70 (non-condensing)				
Installation location	Do not install the pump (Out of doors / In a dusty environment)					Do not install the pump (Out of doors / In a dusty environment)				
Liquid line connection bore	IN					Ø31.8×Ø28.0mm (PFA) 1-1/4 inches union nut and sleeve (SUPER 300-type PILLAR FITTING manufactured by Nippon Pillar Packaging Co., Ltd.)				
	OUT					Ø25.4×Ø22.2mm (PFA) 1 inch union nut and sleeve (SUPER 300-type PILLAR FITTING manufactured by Nippon Pillar Packaging Co., Ltd.)				
Supply air connection size	Rc3/8					Rc1/2				
Purge air port	Ø4 one touch joint					Ø6 one touch joint				
Mass	kg					22				

Note1: The max. discharge capacity is based on pumping clean water at an ambient temperature and the supply air pressure of FLP-60W: 0.2MPa, FLP-75W: 0.3MPa.

Note2: The suction lift is based on pumping clean water at an ambient temperature and the maximum spm.

Dimensions in mm

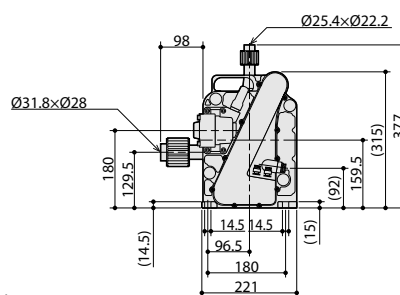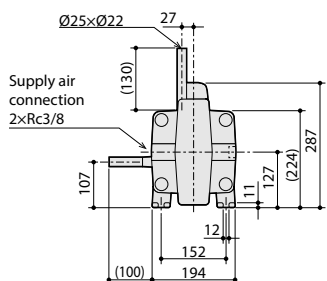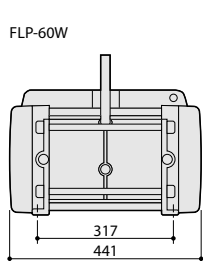

*The same dimensions as the FS-60HT2 in width, depth, and base dimensions as well as inlet & outlet locations allows for simple pump replacement.

Pump Controller LPC-1



Specification

Power voltage	24VDC (-5% to +10%)
Max. power consumption	0.11A
Ambient temperature / humidity	0 to 50°C (non-condensing) / 5 to 90%RH (non-condensing)
Storage temperature / humidity	-10 to 60°C (non-condensing) / 5 to 90%RH (non-condensing)
Installation location	Do not install the controller Out of doors. / In a dusty environment. / Under vibration or impact. Where the controller can get wet with water or oil. / In a corrosive atmosphere.
Explosion proof	This product is not explosion-proof (Do not install the controller under flammable explosive atmosphere)
Mass	1.3kg
Alarm	Leak alarm/Time up alarm/First alarm Electro pneumatic regulator alarm
Other function	In addition to normal operation, constant flow control is also possible. In addition, low pulsation is maintained even during constant flow control.

*European Norm (EMC directive): This product conforms to EN61326-1: 2006 Class A. Observe the EMC requirement, or malfunction or damage of the product may result.

Quick Exhaust Valve QEV



Specification

Model	QEV-15V
Connection bore	Rc1/2
Supply air pressure range	0.1 - 0.5 MPa
Ambient temperature	5 - 40°C
Fluid name	Compressed air
Fluid temperature	5 - 40°C
Effective cross-section area (CV value)	IN → OUT 69mm ² (3.8) OUT → EXH 82mm ² (4.6)
Oil supply	N/A
Mounting position	N/A

- The QEV installed in between the pump and solenoid valve prevents corrosion of the solenoid valve by return air.
- The QEV reduces the resistance of air exhaust to smooth the bellows motion.

IWAKI CO., LTD. 6-6 Kanda-Sudacho 2-chome Chiyoda-ku Tokyo 101-8558 Japan TEL: (81)3 3254 2935 FAX: 3 3252 8892

IWAKI has global net work. Please find your distributor location at

www.iwakupumps.jp

European Headquarter
Germany
The Netherlands (Netherlands Branch)
Italy (Italy Branch)
Spain (Spain Branch)
Poland (East Europe Branch)
Denmark
Finland
Norway
Sweden
Belgium
France

IWAKI Europe GmbH
IWAKI Europe GmbH
IWAKI Europe GmbH
IWAKI Europe GmbH
IWAKI Europe GmbH
IWAKI Nordic A/S
IWAKI Suomi Oy
IWAKI Norge AS
IWAKI Sverige AB
IWAKI Belgium N.V.
IWAKI France S.A.

TEL: (49)2154 9254 0
TEL: (49)2154 9254 50
TEL: (31)74 2420011
TEL: (39)0445 561219
TEL: (34)934 741 638
TEL: (48)12 347 0755
TEL: (45)48 242345
TEL: (358)10 201 0490
TEL: (47)23 38 49 00
TEL: (46)8 511 72900
TEL: (32)13 670200
TEL: (33)1 69 63 33 70

FAX: (49)2154 9254 48
FAX: (49)2154 9254 55
FAX: (49)2154 9254 48
FAX: (39)0445 569088
FAX: (34)934 741 638
FAX: (48)12 347 0900
FAX: (45)48 242345
FAX: (358)10 201 0490
FAX: (47)23 38 49 00
FAX: (46)8 511 72900
FAX: (32)13 672030
FAX: (33)1 64 49 92 73

U.S.A.
Brazil
China (Shanghai)
China (Hong Kong)
China (Guangzhou)
Singapore
Indonesia (Indonesia Office)
Malaysia
Korea
Taiwan
Thailand
Australia

IWAKI America Inc.
IWAKI Do Brasil Comercio De Bombas Hidraulicas Ltda.
IWAKI Pumps (Shanghai) Co., Ltd.
IWAKI Pumps Co., Ltd.
GFTZ IWAKI Engineering & Trading Co., Ltd.
IWAKI Singapore Pte Ltd.
IWAKI Singapore Pte Ltd.
IWAKI Kim SDN. BHD.
IWAKI Korea Co., Ltd.
IWAKI Pumps Taiwan Co., Ltd.
IWAKI (Thailand) Co., Ltd.
IWAKI Pumps Australia Pty Ltd.

TEL: (1)508 429 1440
TEL: (55)19 3244 5900
TEL: (86)21 6272 7502
TEL: (852)2607 1168
TEL: (86)20 84350603
TEL: (65)6316 2028
TEL: (62)21 6906606
TEL: (60)3 7803 8807
TEL: (82)2 6238 4800
TEL: (886)2 8227 6900
TEL: (66)2 322 2471
TEL: (61)2 9899 2411

FAX: (1)508 429 1386
FAX: (55)19 3244 5900
FAX: (86)21 6272 6929
FAX: (852)2607 1000
FAX: (86)20 84359181
FAX: (65)6316 3221
FAX: (62) 21 6906612
FAX: (60)3 7803 4800
FAX: (82)2 6238 4801
FAX: (886)2 8227 6818
FAX: (66)2 322 2477
FAX: (61)2 9899 2421

() Country codes

Caution for safety use: Before use of pump, read instruction manual carefully to use the product correctly. Actual pumps may differ from the photos. Specifications and dimensions are subject to change without prior notice. For further details please contact us.

Legal attention related to export. Our products and/or parts of products fall in the category of goods contained in control list of international regime for export control. Please be reminded that export license could be required when products are exported due to export control regulations of countries. The posting and copying from this catalogue without permission is not accepted firmly.